


# Ducting Kit Instructions



For JEM™ Glaciator™ Dynamic low-fog effect machine

The Glaciator Ducting Kit is a 3-way low-fog diverter kit that handily affixes to the low-fog outlet of the Glaciator. The included ducting adaptor is made of steel and finished in a matte black powder coating. The Ducting Kit includes three 150 mm (6 in.) x 5 m (16.4 ft.) flexible ducting hoses and allows the Glaciator to be located off-stage and for low-fog to be transported to the performance area and evenly distributed. If desired, individual outlet ports on the adaptor can be sealed off and low-fog can be ducted to any or all three of the ports, up to a maximum distance of 10 m (32.8 ft.). The optional Fog Blade system (available separately) can be employed for even more control and dispersion of the low-fog effect.

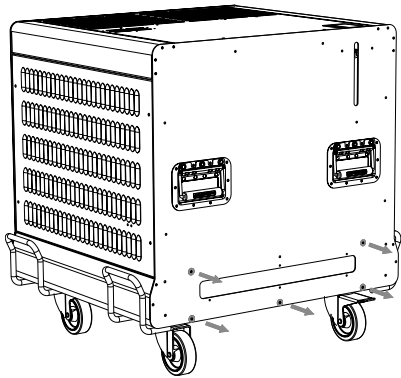


## Tools required:

Pozidrive Screwdriver #2 (PZ 2)

7 mm nut-driver, spanner/wrench or flat-head screwdriver


## Step 1:

Remove the 5x PZ 2 screws highlighted in gray and set aside. Take care not to strip the heads by ensuring the use of a Pozidrive screwdriver.

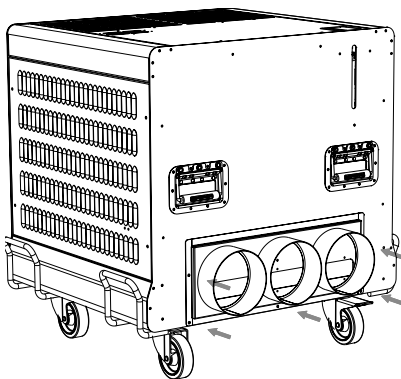

## Step 2:

Position the Ducting Adapter as shown and refit the 5 screws from step 1. Take care not to strip the screw heads by over-tightening or using an electric screwdriver. Hand-tightening should be sufficient to compress the gasket and minimize low-fog leaks.

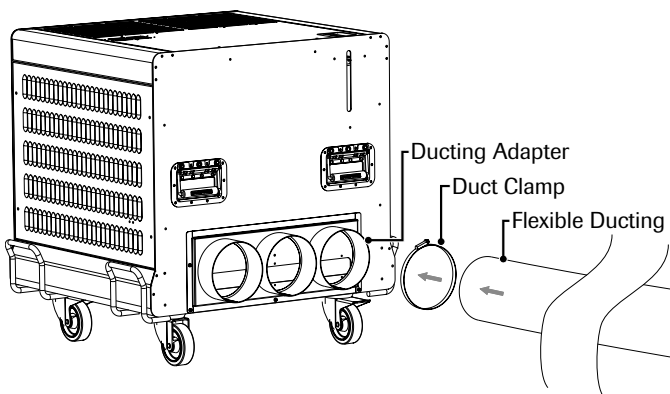

## Step 3:

Slide the duct clamp over the desired flexible duct then carefully slide the duct and clamp over the outlet tube of the Ducting Adapter. Secure the ducting tube by tightening the duct clamp, taking care not to over-tighten the worm drive.

Information subject to change without notice. Harman Professional Denmark ApS disclaims liability for any injury, damage, direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document.

©2018 Harman Professional Denmark ApS. All rights reserved. Martin® is a registered trademark of Harman Professional Denmark ApS registered in the United States and/or other countries. Features, specifications, and appearance are subject to change without notice.

Harman Professional Denmark ApS • Olof Palmes Allé 18 • 8200 Aarhus N • Denmark  
<http://www.martin.com>

PN: 35011536 • Document Revision: A