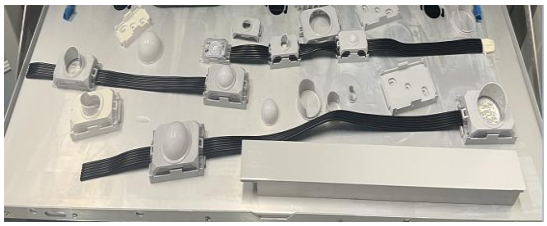
Product Verification and Reliability Report

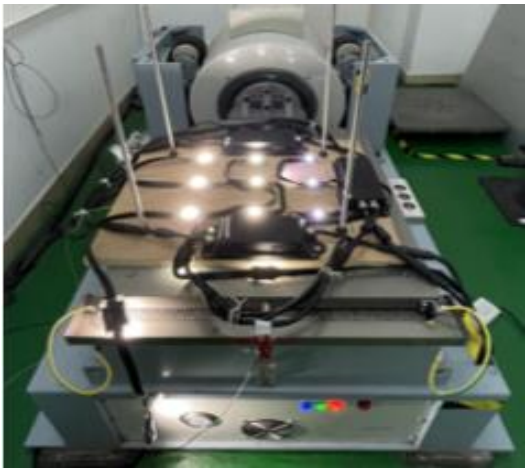
Product: Exterior Dot-1/4/9 Pro

Date: 2024-8-21



Test performed	Condition	Duration	Test lab	Result
Solar Radiation and Moist Test – Method for exposing fixture or components to UV light in the presence of moisture to reproduce the weathering effects (temperature, humidity and/or wetting) 	ISO 4892-2, cyclic no. 1, 102 mins. dry, 18 mins. water spray.	2500 hours	Martin Professional	Pass
IK Class Test -Verification of protection against external mechanical impacts 	EN62262, IK-08	N/A	Martin Professional	Pass

The material contained in this document supersedes all previous documentation issued for the related products included herein. The document and the information contained, in whole or in part, are protected by copyright laws, trademark and design rights. Any unauthorized use of the document and its contents will be considered a violation of Martin Professional ApS intellectual property rights.

Application Vibration Test -Verification of protection against transportation and installation vibration 	Sinusoidal vibration test acc. to IEC 60068-2-6 Random vibration acc. to IEC 60068-2-64. ANSI C136-31 ((Bridge & Overpass Applications 3g) Fixture powered during the test.	3 x 30 mins. 3 x 30 mins. 3 x 30 mins	Martin Professional	Pass
IP Class Test - Verification of protection against intrusion of dust and water  	IP67 according to IEC/EN60598	8h /30 mins.	Martin Professional	Pass
Salt Mist Test – Verification of corrosion resistance of materials and surface coatings 	Neutral Salt Spray test, 5%, 35°C, ASTM B117/ ISO 9227, EN 12944-6, C5-H	1440 hours	Martin Professional	Pass

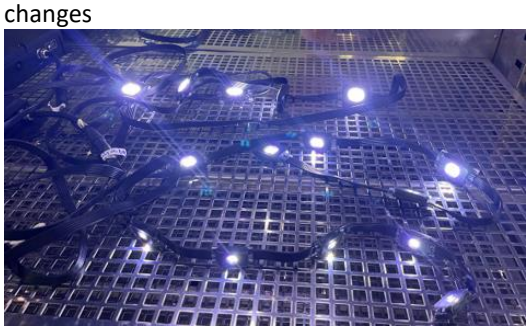
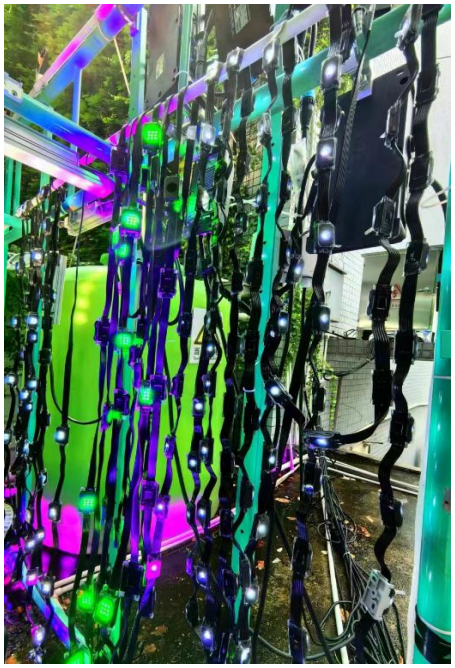
The material contained in this document supersedes all previous documentation issued for the related products included herein. The document and the information contained, in whole or in part, are protected by copyright laws, trademark and design rights. Any unauthorized use of the document and its contents will be considered a violation of Martin Professional ApS intellectual property rights.

Cable Pull Test - Verification of cable mechanical robustness in a product level 	Power on ,20kg	1 hour	Martin Professional	Pass
Surge / Transient Test -Surge immunity from power switches and lightning. 	EN61000-4-5 / Class 4, 4kV	N/A	NTEK	Pass
Packing drop Test - Verification of products and packing strength 	ISTA 3A, 9+8 drops	N/A	Martin Professional	Pass

The material contained in this document supersedes all previous documentation issued for the related products included herein. The document and the information contained, in whole or in part, are protected by copyright laws, trademark and design rights. Any unauthorized use of the document and its contents will be considered a violation of Martin Professional ApS intellectual property rights.

Wind load Test - Wind load simulation.  	Tested according to EN60598-2-5 Static load simulating 60 m/sec. (216 km/h) wind force without causing failure or permanent set to mount bracket	10 mins.	Martin Professional	Pass
Operation Temperature Test - -30 °C to +55 °C during operation 	Tested to ambient temperature Ta (min/max): -30 °C to +55 °C (Above specified temperature range, the fixture regulates output to protect from overheating)	N/A	Martin Professional	Pass
Chlorine Test- Verification of product robustness toward high levels of chloride environment 	Accelerated test based on IEC68-2-60 test regime	106 hours	Danfoss	Pass

The material contained in this document supersedes all previous documentation issued for the related products included herein. The document and the information contained, in whole or in part, are protected by copyright laws, trademark and design rights. Any unauthorized use of the document and its contents will be considered a violation of Martin Professional ApS intellectual property rights.

Cyclic Temperature Test - - Verification of robustness against rapid ambient temperature changes 	-20 °C to +80 °C	35 Cycles	Martin Professional	Pass
Outdoor Lifetime Test - Verification of product lifetime in the outdoor environment 	Power on 24h/7d in the outdoor weathering with permanent	10000 hours	Martin Professional	Ongoing

Report prepared and verified by:	Justin XU, System Engineer
Department:	Martin Professional, R&D, Test and Validation
Date:	2024-8-21
Revision:	A

The material contained in this document supersedes all previous documentation issued for the related products included herein. The document and the information contained, in whole or in part, are protected by copyright laws, trademark and design rights. Any unauthorized use of the document and its contents will be considered a violation of Martin Professional ApS intellectual property rights.