




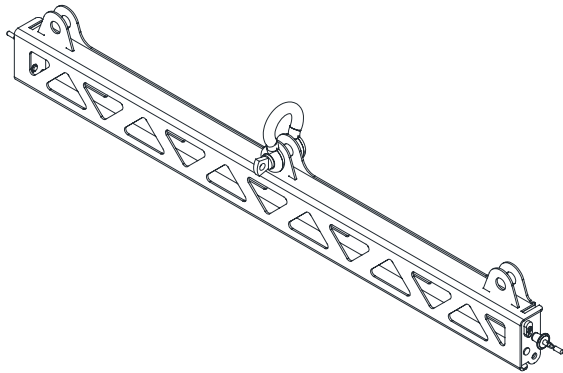


HIGHLIGHTS


- Compatible with VTX A12 and VTX B35
- Attaches to the top or bottom enclosure of an array
- Supports pull-back applications
- Can be used as a compact array frame for VTX A12
- Supports standalone suspension of VTX B35 arrays
- Lightweight design

DESCRIPTION

The VTX A12 SB is a lightweight Suspension Bar that can be used as a compact array frame or to implement pull-back on VTX A12 and VTX B35 arrays. When used for pull-back, the VTX A12 SB attaches to the bottom enclosure of an array, allowing for greater down-tilt than is possible using the array frame alone. The VTX A12 SB can also attach to the top enclosure of an array and serve as a compact array frame. When used with VTX A12, the Suspension Bar connects directly to the rear suspension points of the top enclosure, and the resulting down-tilt angle is determined by the number of enclosures and array geometry. When used with standalone VTX B35 arrays, the Suspension Bar connects to the central attachment points and suspends the array at a flat 0° position. Two VTX A12 SB Suspension Bars can be used for dual-point or quad-point suspension applications, with one bar attached at the top of the array and a second at the bottom to provide additional aiming flexibility. For more information on array configurations and use cases, refer to the **VTX A12 and VTX B35 Rigging Manuals**.

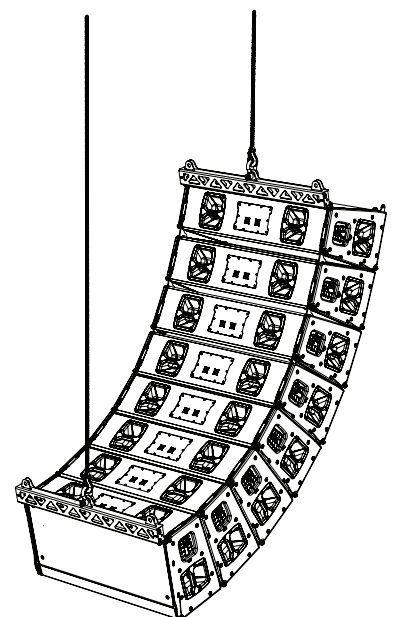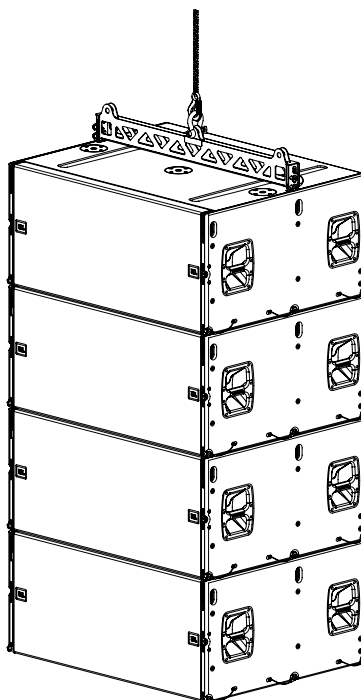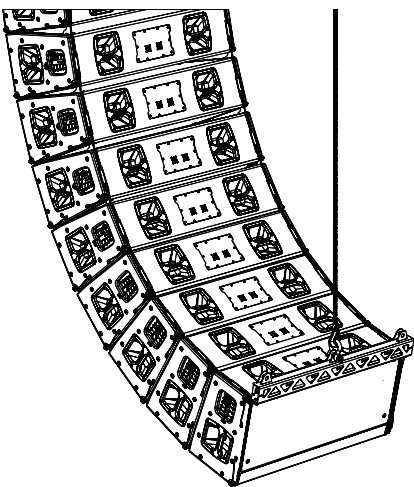

DIMENSIONS

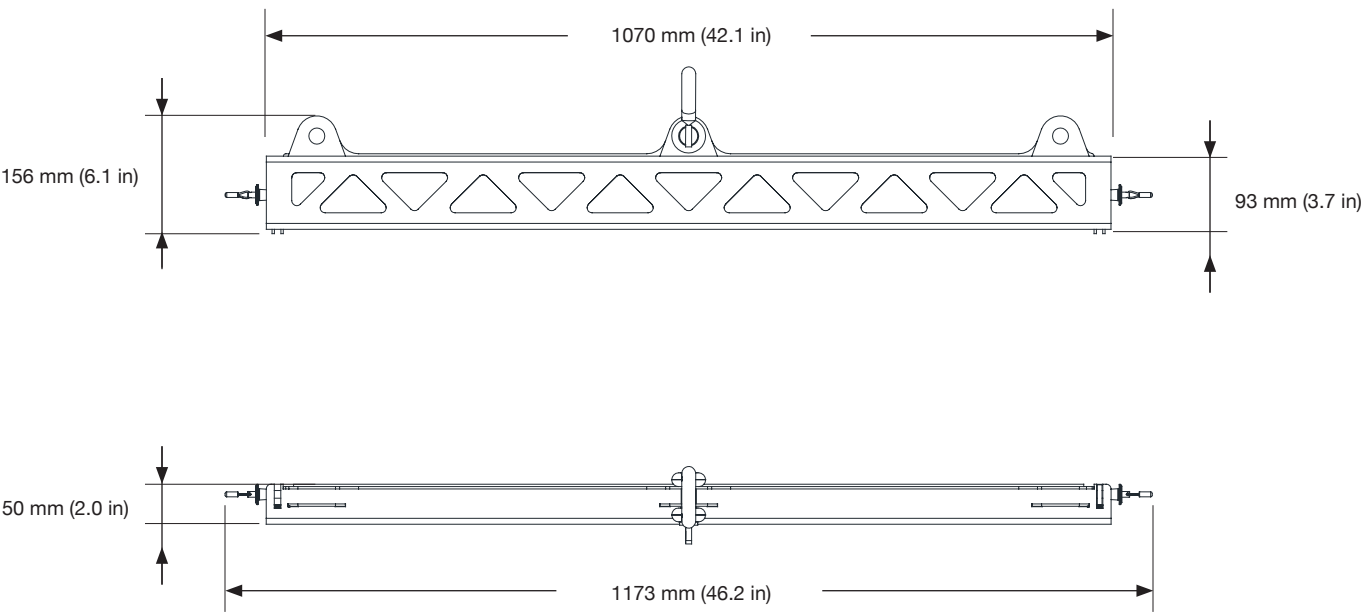

TECHNICAL SPECIFICATIONS

PHYSICAL	
Construction :	High-grade steel with anti-corrosion coating
Finish :	Black powder coat
Compatible Shackle Size :	16 mm (5/8 in)
Mechanical Limits ¹	
Safe Limit :	(18) VTX A12 (6) VTX B35
Maximum :	(18) VTX A12 (12) VTX B35
Dimensions (H x W x D) ² :	156 mm x 1070 mm x 50 mm (6.1 in x 42.1 in x 2.0 in)
Net Weight ³ :	6.4 kg (14 lb)
Shipping Weight :	9.2 kg (20.3 lb)
ORDERING INFORMATION	
SKU :	VTX A12 SB
Included :	(1) VTX A12 SB (1) 5/8-inch Shackles #5044448

Footnotes:
1: Always check mechanical safety with JBL Venue Synthesis software before use. Safe and Maximum Limits are specified per system. For mixed-array configurations, always check mechanical safety using Venue Synthesis. For more information on Safe and Maximum Limits, refer to the **VTX A12 and VTX B35 Rigging Manuals**.
2: Refer to the 2D and 3D Customer Drawings for more detailed dimensions.
3: Weight includes Suspension Bar only. Shackles and other rigging parts not included.

JBL continually engages in research related to product improvement. Some materials, production methods and design refinements are introduced into existing products without notice as a routine expression of that philosophy. For this reason, any current JBL product may differ in some respect from its published description, but will always equal or exceed the original design specifications unless otherwise stated.